

Phone: 514-482-5984

Fax: 514-482-3685

sales@splicetronics.com

www.splicetronics.com



## Splicetronics Solutions

### ADVANTAGES:


- Strong adhesive splice tape used with the splice tool and clip/shim.
- Guarantees a secure connection of SMT component reels.
- Increase SMT Pick and Place Machine output by 5% - 30%.

### DESCRIPTION:

- Sizes: 8mm - 24mm
- Backing Thickness (um): 25
- Total Thickness (um):  $53 \pm 2$
- Peel Strength (N/25mm):  $\geq 15$
- Retention (H/25mm\*25mm):  $> 100$
- Breaking Strength (KN/m):  $> 4.0$

P/N	Category (Actual Width)	Qty/Unit
SSB08	Single Splice 8mm (5mm)	4000 pcs
SSB12	Single Splice 12mm (7mm)	4000 pcs
SSB16	Single Splice 16mm (9mm)	4000 pcs
SSB24	Single Splice 24mm (17mm)	2000 pcs

### BLUE SINGLE SPLICE TAPE

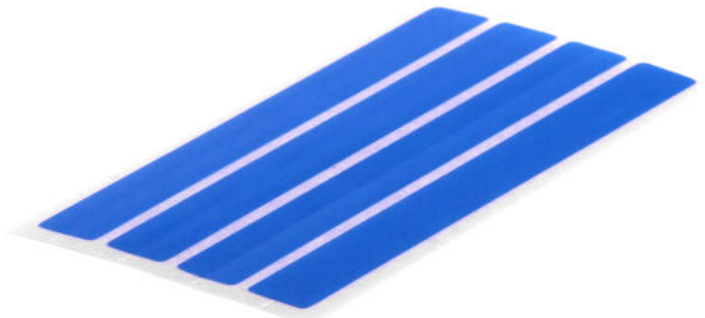

### INSTRUCTIONS:

Cut the component reel at 90 degrees.	Using the pin guides, place the brass clip onto the tool. Add the two reels, center and clamp.
Remove a strip of single splice tape.	Apply the strip to the top of the connecting reel.