

Phone: 514-482-5984  
 Fax: 514-482-3685  
 sales@splicetronics.com  
 www.splicetronics.com




**Splicetronics Solutions**

*Splice Tape is used to join SMT component reels and reduce pick & place machine downtime*

**Advantages:**

- Brass clip used with splicing tool and splice tape of any width
- Holes allow the clip to pass through the feeder
- Increase pick & place machine output 5%-30%
- Reduce reel change downtime
- Guarantees a secure connection of reels
- Decrease machine abrasion by reducing the need to reload the feeder

**BRASS SPLICE CLIP**

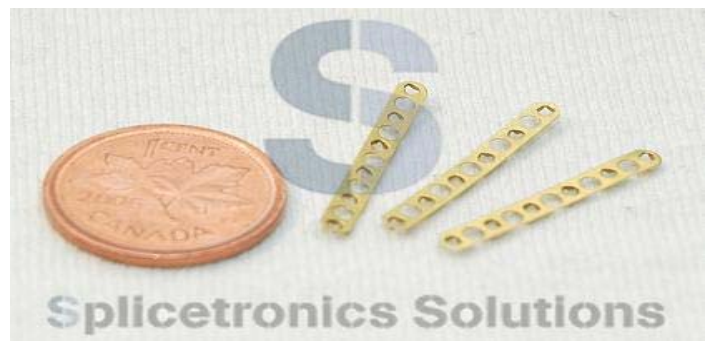

**Description:**

- Material: Brass
- Actual Size: 22mm x 2.5mm
- Packing: 4000 pcs



**Instructions:**

Use the cutting tool to cut the tape at 90 degrees.	Using the pin guides, mount the brass clip onto the tool. Mount the two reels, center and clamp.
Remove a single strip of single splice tape.	Apply the strip to the top of the connecting reel.

P/N	Category	Qty/Unit
CP108	Brass Splice Clip	4000 pcs

**Splicetronics Solutions will allow you to increase manufacturing productivity and reduce operational costs**