

Phone: 514-482-5984

Fax: 514-482-3685

sales@splicetronics.com

www.splicetronics.com




**Splicetronics Solutions**

*Splice Tape is used to join SMT component reels and reduce pick & place machine downtime*

### Advantages:

- Brass clip frame used with Semi-Auto Splicing Tool - ST410
- Holes allow the clip to pass through the feeder
- Increase pick & place machine output 5%-30%
- Reduce reel change downtime
- Guarantees a secure connection of reels
- Decrease machine abrasion by reducing the need to reload the feeder

### BRASS SPLICE CLIP FRAME

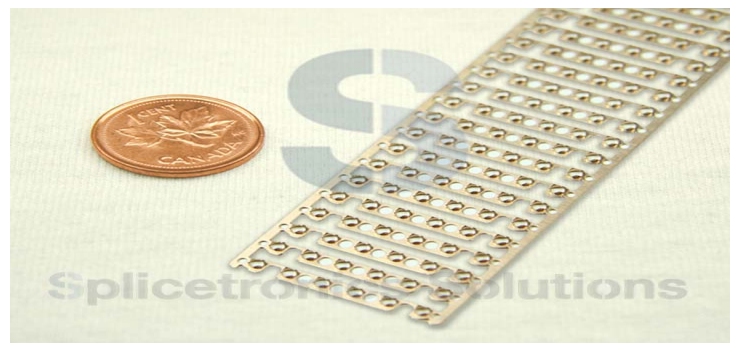

### Description:

- Material: Brass
- Frame Dimensions: 8.5cm x 2.6cm
- Clip Dimensions: 22mm x 2mm
- Packing: 2000pcs (20 Clips/1 Frame)



Used with Semi-Auto Splicing Tool – ST410

### Instructions:

Use the cutting tool to cut the tape at 90 degrees.	Insert a clip frame into the clip rail. Mount the two reels, center and clamp.
Remove a single strip of single splice tape.	Apply the strip to the top of the connecting reel.

P/N	Category	Qty/Unit
CP408	Brass Splice Clip Frame	2000 pcs

**Splicetronics Solutions will allow you to increase manufacturing productivity and reduce operational costs**