

Phone: 514-482-5984
 Fax: 514-482-3685
 sales@splicetronics.com
 www.splicetronics.com



Splicetronics Solutions

Splice Tape is used to join SMT component reels and reduce pick & place machine downtime

Advantages:

- Cuts component reels for accurate alignment during splicing
- Guarantees a straight cut
- Makes full use of components
- Unique design perfect for trimming carrier tapes

CT210 CUTTING TOOL




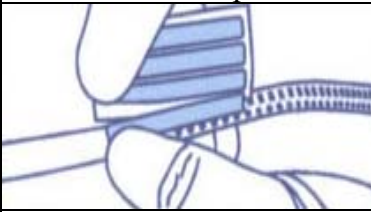


Description:

- Stainless Steel
- Dimensions: 7.5" x 0.5" x 2"
- Weight: 0.4 lb
- Contains two rows of placement pin guides to mount component reels



Instructions:

	
Use the cutting tool to cut the tape at 90 degrees.	Using the pin guides, mount the brass clip onto the tool. Mount the two reels, center and clamp.
	
Remove a single strip of single splice tape.	Apply the strip to the top of the connecting reel.

P/N	Category	Qty/Unit
CT210	Cutting Tool	1 pc

Splicetronics Solutions will allow you to increase manufacturing productivity and reduce operational costs