

Phone: 514-482-5984

Fax: 514-482-3685

sales@splicetronics.com

www.splicetronics.com



Splicetronics Solutions

Splice Tape is used to join SMT component reels and reduce pick & place machine downtime

Advantages:

- Joins reels without the splicing tool and clip
- Significant savings on production costs
- Increase pick & place machine output 5%-30%
- Reduce reel change downtime
- Guarantees precise connection of reels
- Decrease machine abrasion by reducing the need to reload the feeder


DOUBLE SPLICE TAPE



Description:

- Sizes: 8mm, 12mm, 16mm, 24mm
- Backing Thickness (um): 25
- Total Thickness (um): 55±2
- Peel Strength (N/25mm)
 - to steel (25mm*20min): 13
- Retention (H) (25mm*25min): >100
- Tensile strength at break (N/25mm): >80
- Elongation at break (%): >90

Instructions:

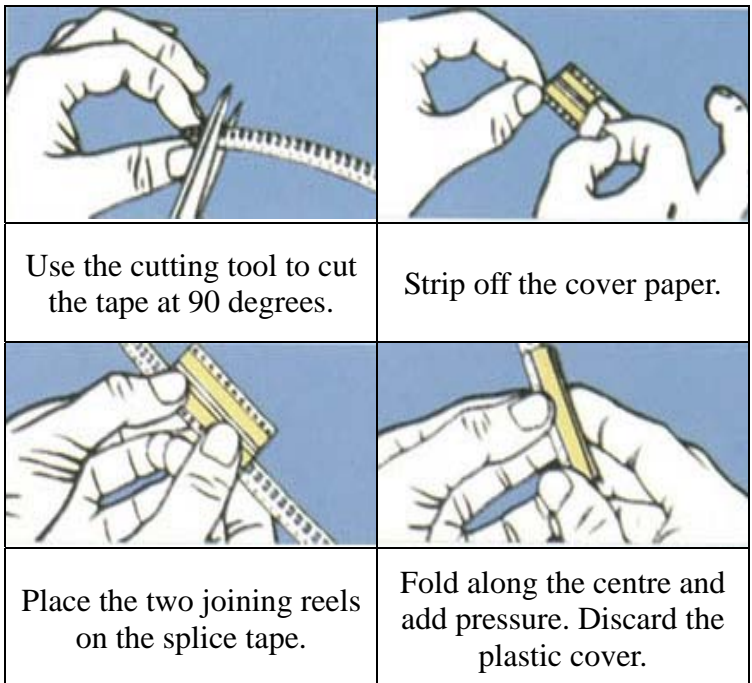

P/N	Category	Qty/Unit
DS108	Double Splice Tape 8mm	500 pcs
DS112	Double Splice Tape 12mm	500 pcs
DS116	Double Splice Tape 16mm	500 pcs
DS124	Double Splice Tape 24mm	500 pcs

Splicetronics Solutions will allow you to increase manufacturing productivity and reduce operational costs