

Phone: 514-482-5984

Fax: 514-482-3685

sales@splicetronics.com

www.splicetronics.com



Splicetronics Solutions

Splice Tape is used to join component reels and reduce pick & place machine down-time

Advantages:

- Significant savings on production costs
- Increase pick & place machine output 5%-30%
- Reduce reel change down-time
- Guarantees a precise connection of reels
- Joins reels without the splicing tool or shim
- Decrease machine abrasion by reducing the need to reload the feeder

Description:


- Sizes: 8mm, 12mm, 16mm, 24mm
- Strip Strength: $\geq 300\text{N/M}$
- Extending Rate: 55%
- Fire-retardant: 94v-0 class
- Insulating Grade: H
- Insulating Resistance: $>10^6$
- Peel Strength: 16N/25mm
- Tensile Strength: 110 N/25mm
- Resist Voltage: 7KV
- Total Thickness: 0.025mm

P/N	Category	Qty/Unit
DS108	Double Splice Tape 8mm	500 pcs
DS112	Double Splice Tape 12mm	500 pcs
DS116	Double Splice Tape 16mm	500 pcs
DS124	Double Splice Tape 24mm	500 pcs

DOUBLE SPLICE TAPE



Instructions:

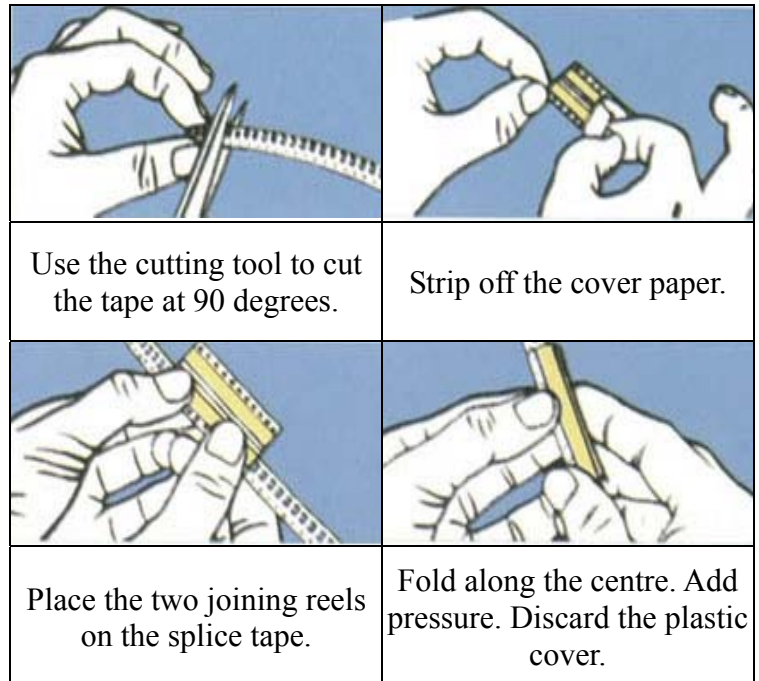

Splicetronics Solutions will allow you increase manufacturing productivity and reduce operational costs