

Phone: 514-482-5984

Fax: 514-482-3685

sales@splicetronics.com

www.splicetronics.com




Splicetronics Solutions

Splice Tape is used to join component reels and reduce pick & place machine down-time

Advantages:

- Significant savings on production costs
- Increase pick & place machine output 5%-30%
- Reduce reel change down-time
- Guarantees a precise connection of reels
- Decrease machine abrasion by reducing the need to reload the feeder
- Used with the splicing tool and brass clip

SINGLE SPLICE TAPE

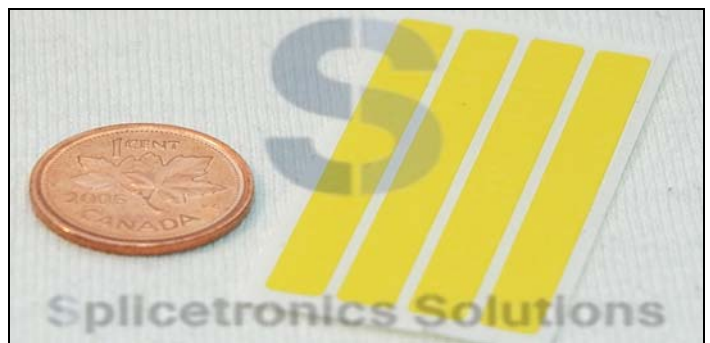

Description:

- Sizes: 8mm, 12mm, 16mm, 24mm
- Strip Strength: $\geq 300\text{N/M}$
- Extending Rate: 55%
- Fire-retardant: 94v-0 class
- Insulating Grade: H
- Insulating Resistance: $>10^6$
- Peel Strength: 16N/25mm
- Tensile Strength: 110 N/25mm
- Resist Voltage: 7KV
- Total Thickness: 0.025mm

Instructions:

Use the cutting tool to cut the tape at 90 degrees.	Using the pin guides, mount the brass clip onto the tool. Mount the two reels, center and clamp.
Remove a single strip of single splice tape.	Apply the strip to the top of the connecting reel.

P/N	Category	Qty/Unit
SS208	Single Splice Tape 8mm	4000 pcs
SS112	Single Splice Tape 12mm	4000 pcs
SS116	Single Splice Tape 16mm	4000 pcs
SS124	Single Splice Tape 24mm	2000 pcs

Splicetronics Solutions will allow you increase manufacturing productivity and reduce operational costs