

Phone: 514-482-5984  
 Fax: 514-482-3685  
 sales@splicetronics.com  
 www.splicetronics.com




**Splicetronics Solutions**

*Splice Tape is used to join SMT component reels and reduce pick & place machine downtime*

**Advantages:**

- Used with the splicing tool and clip
- Significant savings on production costs
- Increase pick & place machine output 5%-30%
- Reduce reel change downtime
- Guarantees a precise connection of reels
- Decrease machine abrasion by reducing the need to reload the feeder

**SINGLE SPLICE TAPE**

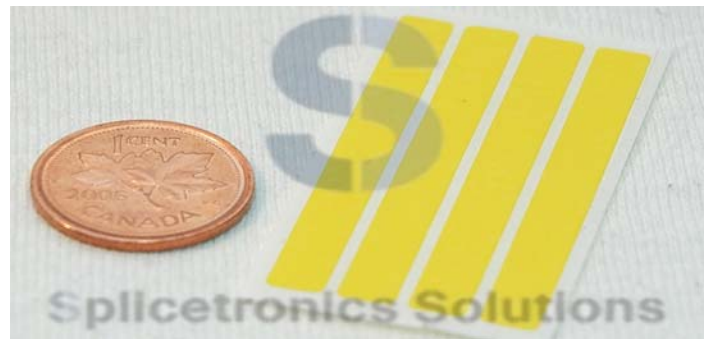

**Description:**

- Sizes: 8mm, 12mm, 16mm, 24mm
- Backing Thickness (um): 25
- Total Thickness (um): 55±2
- Peel Strength (N/25mm)
  - to steel (25mm\*20min): 13
- Retention (H) (25mm\*25min): >100
- Tensile strength at break (N/25mm): >80
- Elongation at break (%): >90

**Instructions:**

Use the cutting tool to cut the tape at 90 degrees.	Using the pin guides, mount the brass clip onto the tool. Mount the two reels, center and clamp.
Remove a single strip of single splice tape.	Apply the strip to the top of the connecting reel.

P/N	Category	Qty/Unit
SS208	Single Splice Tape 8mm	4000 pcs
SS112	Single Splice Tape 12mm	4000 pcs
SS116	Single Splice Tape 16mm	4000 pcs
SS124	Single Splice Tape 24mm	2000 pcs

**Splicetronics Solutions will allow you to increase manufacturing productivity and reduce operational costs**