

Phone: 514-482-5984

Fax: 514-482-3685

sales@splicetronics.com

www.splicetronics.com




Splicetronics Solutions

Splice Tape is used to join SMT component reels and reduce pick & place machine downtime

Advantages:

- Necessary for feeders with a special sensor
- Used with the splicing tool and clip
- Significant savings on production costs
- Increase pick & place machine output 5%-30%
- Reduce reel change downtime
- Guarantees precise connection of reels
- Decrease machine abrasion by reducing the need to reload the feeder

SINGLE BLACK SPLICE

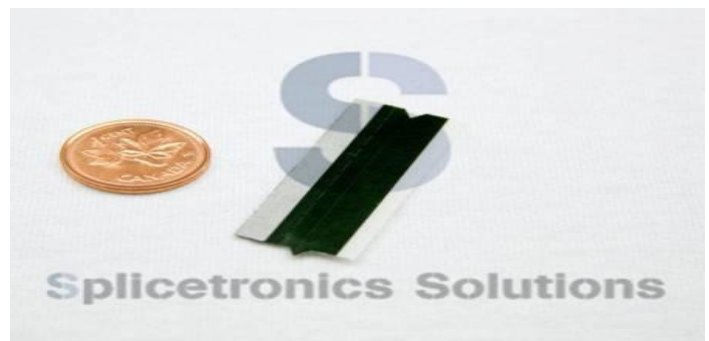

Description:

- Size: 8mm
- Backing Thickness (um): 25
- Total Thickness (um): 55±2
- Peel Strength (N/25mm)
 - to steel (25mm*20min): 13
- Retention (H) (25mm*25min): >100
- Tensile strength at break (N/25mm): >80
- Elongation at break (%): >90

Instructions:

Use the cutting tool to cut the tape at 90 degrees.	Using the pin guides, mount the brass clip onto the tool. Mount the two reels, center and clamp.
Remove a single strip of single splice tape.	Apply the strip to the top of the connecting reel.

P/N	Category	Qty/Unit
SSP08	Single Black Splice Tape 8mm	1000 pcs

Splicetronics Solutions will allow you to increase manufacturing productivity and reduce operational costs