



SPLICE CLIP FRAME

Splicetronics Solutions

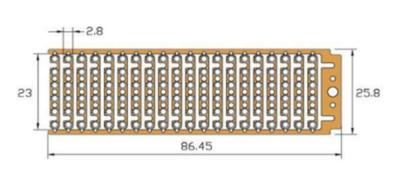



| Part | Dimensions (pc) | Thickness | Package | Material |
|-------|-----------------|-----------|-------------|-------------------|
| CP408 | 23mm x 2.8mm | 0.1mm | 2000pcs/box | Phosphorus-Copper |

APPLICATION

- S Bandolier designed shim used with the ST410 stapler splice tool
- S Use with splice tapes of any size
- S Ensures SMT carrier tapes of all widths can be joined quickly and securely

ADVANTAGES

- S Holes allow the clip to pass through the sprocket wheel of the feeder
- Sharp edges easily pierce carrier tapes
- S Guarantees a secure connection
- S Use 20 clips per frame before reloading

INSTRUCTIONS

- S Pull the slider of the ST410 tool, and gently place a clip frame inside the handle rail.
- S Press the button, and slowly advance the slider forward until the frame hits the pins.
- S Center both carrier tapes (cover tape up) on the pins, and secure with the clamps.
- S Crimp the handle to connect the carrier tapes.
- S Add a splice tape strip to the cover tape and press firmly to complete the splice.



sales@splicetronics.com