

Phone: 514-482-5984

Fax: 514-482-3685

sales@splicetronics.com

www.splicetronics.com



Splicetronics Solutions

ADVANTAGES:

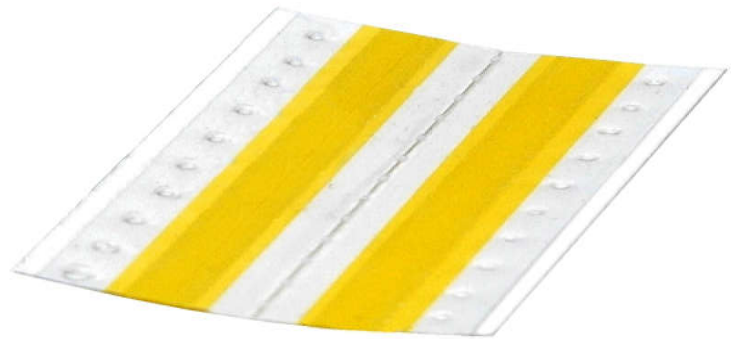
- Ⓢ Possible to join SMT component reels without the splice tool and clip.
- Ⓢ Guarantees a precise connection of SMT component reels.
- Ⓢ Increase SMT Pick and Place Machine output by 5% - 30%.

DESCRIPTION:



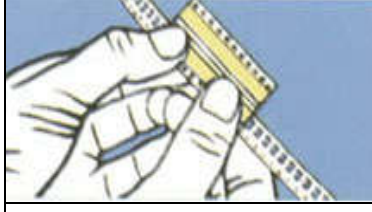

- Ⓢ Sizes: 8mm - 24mm
- Ⓢ Backing Thickness (um): 25
- Ⓢ Total Thickness (um): 53±2
- Ⓢ Peel Strength (N/25mm): ≥13
- Ⓢ Retention (H/25mm*25mm): >100
- Ⓢ Breaking Strength (KN/m): >4.0

P/N	Category	Qty/Unit
DS108	Double Splice Tape 8mm	500 pcs
DS112	Double Splice Tape 12mm	500 pcs
DS116	Double Splice Tape 16mm	500 pcs
DS124	Double Splice Tape 24mm	500 pcs

DOUBLE SPLICE TAPE



INSTRUCTIONS:

	
Cut the component reel at 90 degrees.	Remove the release liner.
	
Place the splice tape on the two joining reels.	Fold along the centre and add pressure. Discard the plastic cover.