

Phone: 514-482-5984
Fax: 514-482-3685

sales@splicetronics.com
www.splicetronics.com



Splicetronics Solutions

ADVANTAGES:

- Ⓢ Possible to join SMT component reels without the splice tool and clip.
- Ⓢ Strong adhesive bond.
- Ⓢ Increase SMT Pick and Place Machine output by 5% - 30%.

BLUE DOUBLE SPLICE TAPE



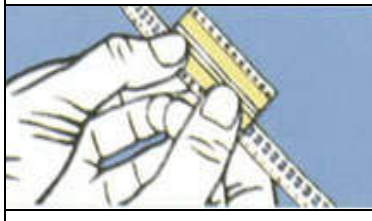
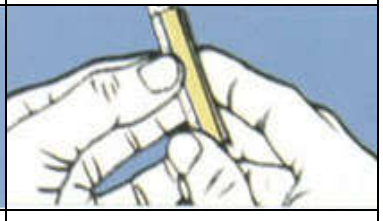


DESCRIPTION:

- Ⓢ Sizes: 8mm - 24mm
- Ⓢ Backing Thickness (um): 25
- Ⓢ Total Thickness (um): 53±2
- Ⓢ Peel Strength (N/25mm): ≥15
- Ⓢ Retention (H/25mm*25mm): >100
- Ⓢ Breaking Strength (KN/m): >4.0

P/N	Category	Qty/Unit
DSB08	Blue Double Splice 8mm	500 pcs
DSB12	Blue Double Splice 12mm	500 pcs
DSB16	Blue Double Splice 16mm	500 pcs
DSB24	Blue Double Splice 24mm	500 pcs

INSTRUCTIONS:

	
Cut the component reel at 90 degrees.	Remove the release liner.
	
Place the splice tape on the two joining reels.	Fold along the centre and add pressure. Discard the plastic cover.