

Phone: 514-482-5984  
Fax: 514-482-3685

sales@splicetronics.com  
www.splicetronics.com



## Splicetronics Solutions

### ADVANTAGES:

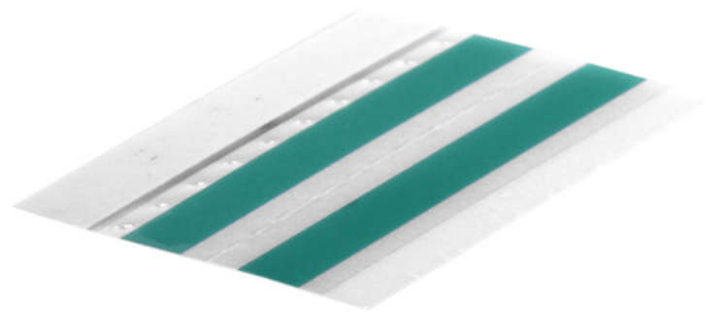
- Ⓢ Possible to join SMT component reels without the splice tool and clip.
- Ⓢ Double splice tape with light green transparent material.
- Ⓢ Increase SMT Pick and Place Machine output by 5% - 30%.

### DESCRIPTION:



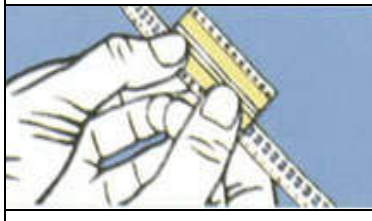
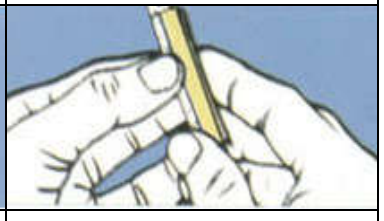
- Ⓢ Sizes: 8mm - 24mm
- Ⓢ Backing Thickness (um): 25
- Ⓢ Total Thickness (um): 53±2
- Ⓢ Peel Strength (N/25mm): ≥15
- Ⓢ Retention (H/25mm\*25mm): >100
- Ⓢ Breaking Strength (KN/m): >4.0

P/N	Category	Qty/Unit
DSG08	Green Double Splice 8mm	500 pcs
DSG12	Green Double Splice 12mm	500 pcs
DSG16	Green Double Splice 16mm	500 pcs
DSG24	Green Double Splice 24mm	500 pcs

### GREEN DOUBLE SPLICE TAPE



### INSTRUCTIONS:

	
Cut the component reel at 90 degrees.	Remove the release liner.
	
Place the splice tape on the two joining reels.	Fold along the centre and add pressure. Discard the plastic cover.