

Phone: 514-482-5984

Fax: 514-482-3685

sales@splicetronics.com

www.splicetronics.com



Splicetronics Solutions

ADVANTAGES:

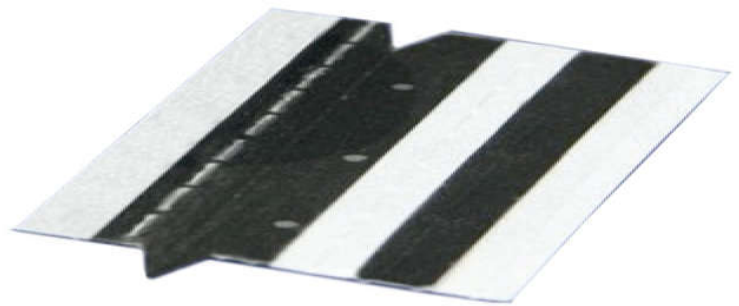
- Ⓢ Possible to join SMT component reels without the splice tool and clip.
- Ⓢ Double splice tape necessary for feeders with a sensor.
- Ⓢ Increase SMT Pick and Place Machine output by 5% - 30%.

DESCRIPTION:



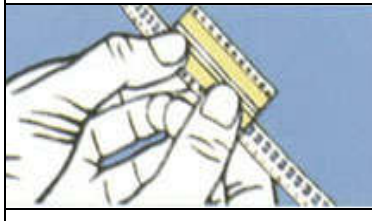
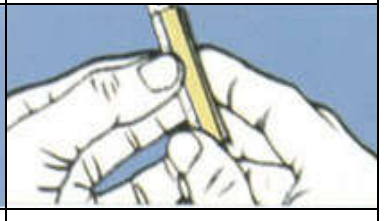
- Ⓢ Sizes: 8mm - 44mm
- Ⓢ Backing Thickness (um): 25
- Ⓢ Total Thickness (um): 53 ± 2
- Ⓢ Peel Strength (N/25mm): ≥ 15
- Ⓢ Retention (H/25mm*25mm): > 100
- Ⓢ Breaking Strength (KN/m): > 4.0

P/N	Category	Qty/Unit
DSP08	Black Double Splice 8mm	500 pcs
DSP12	Black Double Splice 12mm	500 pcs
DSP16	Black Double Splice 16mm	500 pcs
DSP24	Black Double Splice 24mm	250 pcs
DSP32	Black Double Splice 32mm	250 pcs
DSP44	Black Double Splice 44mm	250 pcs

BLACK DOUBLE SPLICE TAPE



INSTRUCTIONS:

	
Cut the component reel at 90 degrees.	Remove the release liner.
	
Place the splice tape on the two joining reels.	Fold along the centre and add pressure. Discard the plastic cover.