

Phone: 514-482-5984
Fax: 514-482-3685

sales@splicetronics.com
www.splicetronics.com



Splicetronics Solutions

ADVANTAGES:


- Ⓢ Possible to join SMT component reels without the splice tool and clip.
- Ⓢ Double splice tape for feeders with specific configurations.
- Ⓢ Increase SMT Pick and Place Machine output by 5% - 30%.

DESCRIPTION:

- Ⓢ Sizes: 8mm - 24mm
- Ⓢ Backing Thickness (um): 20
- Ⓢ Total Thickness (um): 48 ± 2
- Ⓢ Peel Strength (N/25mm): ≥ 15
- Ⓢ Retention (H/25mm*25mm): > 100
- Ⓢ Breaking Strength (KN/m): > 2.0

P/N	Category	Qty/Unit
DSSL08	Double Splice Tape 8mm	500 pcs
DSSL12	Double Splice Tape 12mm	500 pcs
DSSL16	Double Splice Tape 16mm	500 pcs
DSSL24	Double Splice Tape 24mm	500 pcs

SILVER DOUBLE SPLICE TAPE

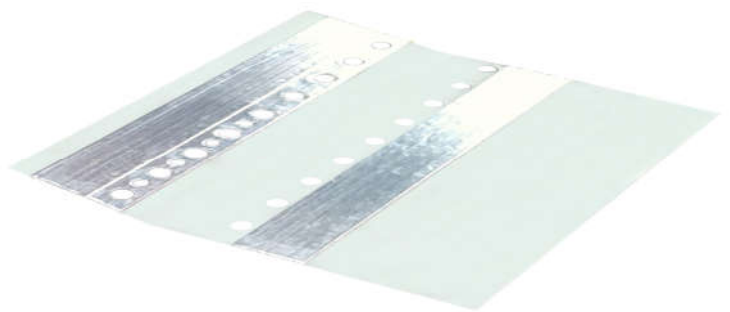

INSTRUCTIONS:

Cut the component reel at 90 degrees.	Remove the release liner.
Place the splice tape on the two joining reels.	Fold along the centre and add pressure. Discard the plastic cover.