




DOUBLE SPLICE TAPE

Splicetronics Solutions

| Part (reel) | Dimensions (pc) | Package |
|--------------|--------------------------|------------|
| DSU308 (8mm) | 34mm x 2.3/1.6/1.6/4.5mm | 500pcs/box |
| DSU208 (8mm) | 34mm x 2.3/4.5/4.5mm | 500pcs/box |

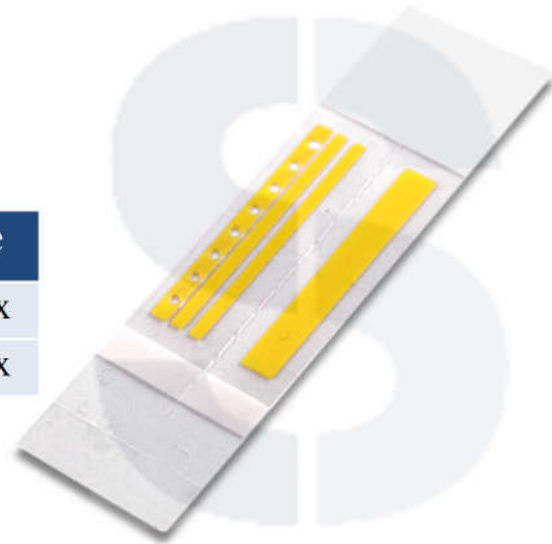

APPLICATION

- Ⓢ Strips of yellow PET tape used to join 8mm SMT carrier tapes
- Ⓢ Possible to use without the splice tool and clip
- Ⓢ Also available in 3pc design (DSU208)

ADVANTAGES

- Ⓢ Increase Pick and Place machine output by 5% - 30%
- Ⓢ Reduce reel change downtime
- Ⓢ Decrease machine abrasion by reducing the need to reload the feeder
- Ⓢ Placement holes for easy alignment

INSTRUCTIONS

- Ⓢ Use the cutting tool (CT210/CT410) to accurately cut the carrier tapes.
- Ⓢ Remove the split liner of the splice tape to reveal the adhesive side.
- Ⓢ Align the cut carrier tapes (cover tape down) with the splice tape placement holes.
- Ⓢ Place both joining carrier tapes onto the first strip of the splice tape.
- Ⓢ Fold over the second strip to the underside of the carrier tape and press firmly.
- Ⓢ Remove and discard the clear plastic cover to complete the splice.

